



Study of reflection and transmission of plane waves at thermoelastic-diffusive solid/liquid interface

Abstract

The paper concentrates on the study of reflection and transmission characteristics of waves at the interface of a thermoelastic-diffusive solid half-space underlying an inviscid liquid. The analytic expressions for amplitude ratios, reflection and transmission coefficients, in terms of incident angles and material parameters have been obtained for quasi-longitudinal (qP) and quasi-transverse (qSV) wave incidence. The normal and grazing incidence cases have also been derived and discussed. The total reflection phenomenon has also been discussed. The energy law has been shown to be obeyed by the incidence, reflected and transmitted waves by deriving energy equation and its simulation. The numerical computations of reflection and transmission coefficients have been carried out for copper material half-space in contact with water at the interface by using MATLAB software. The computer simulated results have been presented graphically in order to bring out clear comparison of various situations.

Keywords

Thermoelastic Diffusion, Inviscid fluid, Reflection, Transmission, Energy Ratios, Critical angle.

J.N. Sharma ^a

R. Kaur ^b

Department of Mathematics, National
Institute of Technology
Hamirpur-177005, India

^a jnsnith@gmail.com

^b kaur.rajbir22@gmail.com

Received 15.05.2014

In revised form 29.06.2014

Accepted 18.08.2014

Available online 26.09.2014

1 INTRODUCTION

Diffusion is defined as a movement of the particles from a region of high concentration to the low concentration. Thermal diffusion utilizes the transfer of heat across a thin liquid or gas to accomplish isotope separation. Today, the study of thermal diffusion phenomenon got a great deal of interest due to its wide ranging applications in geophysics and industrial applications. The concentration obeys the famous Fick's law, which does not take into consideration the mutual interaction between the solvent and the solute or the effect of temperature on this interaction.

However, there is a certain degree of coupling with temperature and temperature gradients as temperature speeds up the diffusion process. The thermo-diffusion in elastic solids is due to coupling of temperature, mass diffusion and strain fields addition to heat and mass exchange with the environment. Nowacki (1974, 1976) developed the theory of coupled thermoelastic diffusion. The recent development of generalized theory of thermoelastic diffusion by Sherief *et al.* (2004) allows the finite speed of propagation of thermo-diffusive waves. Sharma (2007) discussed the propagation of plane harmonic waves in generalized thermo-elasto-diffusive solid. Kumar *et al.* (2014) studied the propagation of Rayleigh waves in a homogeneous isotropic micro-stretch generalized thermoelastic diffusion solid half-space.

The phenomenon of wave reflection and refraction is a fundamental topic in many fields such as seismology, geophysics, earthquake engineering, non-destructive evaluation, etc. Jeffreys (1930) and Gutenberg (1944) considered the reflection of elastic plane waves at a solid half space. Knott (1899) derived the general equations for reflection and refraction of waves at plane boundaries. Singh (2005) discussed the reflection of P and SV waves from the free surface of an elastic solid with generalized thermo-diffusion. Singh (2006) studied the reflection of SV waves from the free surface of an elastic solid in generalized thermo-elastic diffusion. Sharma and Sharma (2010) investigated the reflection characteristics of acousto-diffusive waves from the surface of a semiconductor half-space which is subjected to stress free, isoconcentrated and stress free, impermeable conditions. Kumar and Kansal (2012) considered the reflection and refraction of plane waves at the interface of an elastic solid half-space and a thermoelastic diffusive solid half-space. Bijarnia and Singh (2012) investigated the propagation of plane waves in a transversely isotropic generalized thermoelastic solid half-space with diffusion and they also studied the reflection of these plane waves from a thermally insulated free surface. Kumar *et al.* (2013) studied the reflection and refraction phenomenon due to plane wave's incident obliquely at a plane interface between uniform elastic solid half-space and microstretch thermoelastic diffusion solid half-space.

Wu, *et al.* (1990) investigated the reflection and transmission of elastic waves from the boundary of a fluid-saturated porous solid. Lin, *et al.* (2005) studied the reflection of plane waves in a poroelastic half-space saturated with inviscid fluid. Deresiewicz (1960) studied the reflection of plane waves from a plane stress-free boundary in the coupled theory of thermoelasticity. Sharma, *et al.* (2003) studied the reflection of generalized thermoelastic from the boundary of a half space. Sinha and Sinha (1974) and Sinha and Elsibai (1996, 1997) investigated the reflection of thermoelastic waves from the free surface of a solid half-space and at the interface of two semi-infinite media in welded contact, in the context of generalized thermoelasticity. Das, *et al.* (2008) explored the reflection of generalized thermoelastic waves from isothermal and insulated boundaries of a half space. Sharma, *et al.* (2008) studied the reflection of piezo-thermoelastic waves from the charge free and stress free boundary of transversely isotropic half space. Abd-Alla and Al-Dawy (2000) discussed the reflection of thermoelastic plane wave at a generalized thermoelastic half space with one and two relaxation times. Singh (2010) applied the LS and GL theories of generalized thermoelasticity to study the reflection from a thermally insulated stress-free thermoelastic solid half-space of monoclinic type. Sharma *et al.* (2012) studied the reflection and transmission characteristics of acoustic waves at an interface of a semiconductor half-space

underlying an inviscid liquid. Sharma and Bhargava (2014) investigated the reflection and transmission of thermoelastic plane waves at an imperfect interface between a thermal conducting viscous-liquid and generalized thermoelastic solid half-space. Sharma, *et al.* (2008) studied the generalized Rayleigh waves in thermoelastic solids under viscous fluid loading.

Keeping in view the above state facts and applications of reflection/transmission phenomenon in thermoelastic-diffusive solid under the interaction of fluid, the present paper is devoted to discuss the reflection and transmission of plane waves at the interface between such continua. The effects of incident angles, material parameters and fluid loading on reflection and transmission coefficients of various possible waves due to the incident qP and qSV waves have been considered. The analytical results so obtained have been verified numerically and are illustrated graphically.

2 FORMULATION OF THE PROBLEM

We consider a homogeneous isotropic, thermoelastic-diffusive solid in the undeformed state initially at uniform temperature T_0 , underlying an inviscid liquid half-space. We take origin of the rectangular Cartesian co-ordinate system $Oxyz$ at any point on the plane surface (interface) with z -axis directed normally into the solid half-space, which is thus represented by $z \geq 0$ as shown in Figure 1. We choose the x -axis along the direction of propagation of waves in such a way that all the particles on the line parallel to the y -axis are equally displaced. Therefore, all the field quantities are independent of y -co-ordinate. Further, the disturbances are assumed to be confined to the neighborhood of the interface $z = 0$ and hence vanish as $z \rightarrow \infty$.

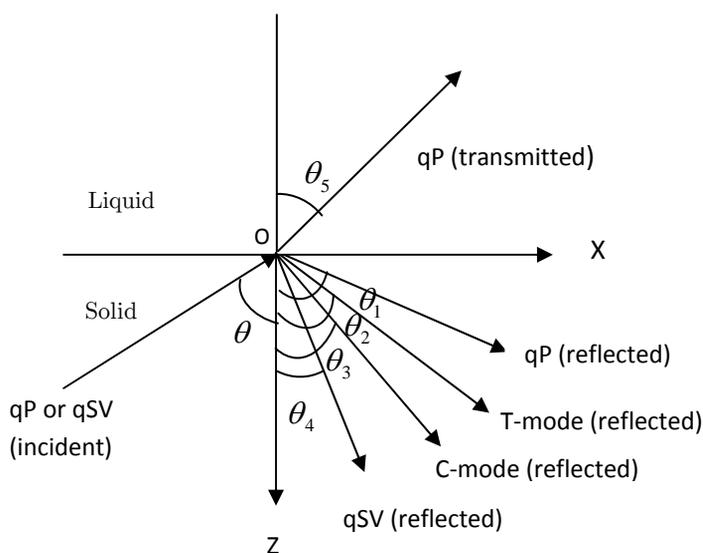


Figure 1: Geometry of the problem.

The basic governing field equations of motion, heat conduction equation, mass equation and constitutive relations for a solid medium, in the absence of heat sources and body forces, are given by Sherief *et al.* (2004)

$$\mu \nabla^2 \vec{u} + (\lambda + \mu) \nabla \nabla \cdot \vec{u} - \beta_1 \nabla T - \beta_2 \nabla C = \rho \ddot{\vec{u}} \tag{1}$$

$$K \nabla^2 T - \rho C_e (\dot{T} + t_0 \ddot{T}) - \beta_1 T_0 \nabla \cdot (\dot{\vec{u}} + t_0 \ddot{\vec{u}}) - a T_0 (\dot{C} + t_0 \ddot{C}) = 0 \tag{2}$$

$$\nabla^2 C - \frac{1}{Db} (\dot{C} + t_1 \ddot{C}) - \frac{\beta_2}{b} \nabla^2 (\nabla \cdot \vec{u}) - \frac{a}{b} \nabla^2 T = 0 \tag{3}$$

$$\tau_{ij} = \lambda e_{kk} \delta_{ij} + 2\mu e_{ij} - \beta_1 T \delta_{ij} - \beta_2 C \delta_{ij} \tag{4}$$

$$P = -\beta_2 e_{kk} + bC - aT, \quad i, j, k = 1, 2, 3 \tag{5}$$

where $\beta_1 = (3\lambda + 2\mu)\alpha_T$, $\beta_2 = (3\lambda + 2\mu)\alpha_C$,

Here $\vec{u}(x, y, z, t) = (u, v, w)$, $T(x, y, z, t)$ and $C(x, y, z, t)$ are the displacement vector, temperature change and mass concentration respectively. Here α_T , α_C are coefficients of linear thermal expansion and linear diffusion expansion; λ , μ are Lamé’s parameters; ρ is the mass density; K is the thermal conductivity; D is the mass diffusion coefficient; a and b are thermo-diffusive and diffusive constants; t_0 and t_1 are thermal and mass flux relaxation times and C_e is the specific heat at constant strain. The quantity δ_{ij} is the Kronecker’s delta with $j = 1$ for Lord and Shulman (LS) theory (1967) and $j = 2$ for Green and Lindsay (GL) theory (1972). The superposed dot notation is used for time differentiation.

The basic governing equations for inviscid fluid (liquid) medium are given by

$$\lambda_L \nabla \nabla \cdot \vec{u}_L - \beta_L^* \nabla T_L = \rho_L \ddot{\vec{u}}_L \tag{6}$$

$$T_L = -\frac{\beta_L^* T_0^*}{\rho_L C_V^*} \nabla \cdot \vec{u}_L \tag{7}$$

where $\beta_L^* = 3\lambda_L \alpha^*$; λ_L is the bulk modulus; ρ_L and α^* are the density and coefficient of volume thermal expansion; $\vec{u}_L = (u_L, 0, w_L)$ is the velocity vector and T_L is the temperature deviation in the liquid temperature from its ambient temperature T_0^* .

In order to facilitate the analysis, we define the following dimensionless quantities

$$X = \frac{\omega^* x}{c_1}, Z = \frac{\omega^* z}{c_1}, \tau = \omega^* t, \Theta = \frac{T}{T_0}, \mathcal{G} = \frac{C}{C_0}, \Theta_L = \frac{T_L}{T_0},$$

$$\begin{aligned} \bar{U} &= \frac{\rho\omega^*c_1\bar{u}}{\beta_1T_0}, \bar{W} = \frac{\rho\omega^*c_1\bar{w}}{\beta_1T_0}, \bar{U}_L = \frac{\rho\omega^*c_1\bar{u}_L}{\beta_1T_0}, \bar{W}_L = \frac{\rho\omega^*c_1\bar{w}_L}{\beta_1T_0}, \\ \sigma_{ij} &= \frac{\tau_{ij}}{\beta_1T_0}, \delta^2 = \frac{c_2^2}{c_1^2}, \delta_L^2 = \frac{c_L^2}{c_1^2}, \tau_0 = \omega^*t_0, \tau_1 = \omega^*t_1, \\ \varepsilon_T &= \frac{\beta_1^2T_0}{\rho C_e(\lambda + 2\mu)}, \varepsilon_C = \frac{\beta_2^2}{b(\lambda + 2\mu)}, \varepsilon_L = \frac{\beta_L^{*2}T_0}{\rho_L c_V^* \lambda_L}, \\ \bar{a} &= \frac{aC_0}{\rho C_e}, \bar{b} = \frac{aT_0}{b^*C_0}, \bar{\beta} = \frac{\beta_2C_0}{\beta_1T_0}, \beta = \frac{\beta_L^*}{\beta_1} \end{aligned} \tag{8}$$

where $\omega^* = \frac{C_e(\lambda + 2\mu)}{K}$, $\tilde{w}_b = \frac{c_1^2}{\omega^*Db}$, $c_1^2 = \frac{\lambda + 2\mu}{\rho}$, $c_2^2 = \frac{\mu}{\rho}$, $c_L^2 = \frac{\lambda_L}{\rho_L}$.

Here ω^* is the characteristic frequency, ε_T and ε_C are thermo-mechanical coupling constant and mass concentration of the solid respectively, c_1, c_2 are respectively the longitudinal and shear wave velocities in the solid half-space, ε_L is the thermomechanical coupling and c_L is the velocity of sound in the fluid.

Upon using quantities (8) in equations (1)-(7), we obtain

$$\delta^2 \nabla \bar{U} + (1 - \delta^2) \nabla \nabla \cdot \bar{U} - \nabla \theta - \bar{\beta} \nabla \vartheta = \ddot{U} \tag{9}$$

$$\nabla^2 \Theta - (\dot{\Theta} + \tau_0 \ddot{\Theta}) - \varepsilon_T \nabla \cdot (\dot{U} + \tau_0 \ddot{U}) - \bar{a}(\dot{\vartheta} + \tau_0 \ddot{\vartheta}) = 0 \tag{10}$$

$$\nabla^2 \vartheta - \tilde{w}_b(\dot{\vartheta} + \tau_1 \ddot{\vartheta}) - \frac{\varepsilon_c}{\bar{\beta}} \nabla^2 (\nabla \cdot \bar{U}) - \bar{b} \nabla^2 \Theta = 0 \tag{11}$$

$$\sigma_{ij} = (1 - 2\delta^2) \nabla \cdot \bar{U} \delta_{ij} + \delta^2 (U_{i,j} + U_{j,i}) - \Theta \delta_{ij} - \bar{\beta} \vartheta \delta_{ij} \tag{12}$$

$$P = -\varepsilon_C \nabla \cdot \bar{U} \delta_{ij} + \vartheta - \bar{b} \Theta \tag{13}$$

$$\delta_L^2 \nabla \nabla \cdot \bar{U}_L - \frac{\beta}{\bar{\rho}} \nabla \Theta_L = \ddot{U}_L \tag{14}$$

$$\Theta_L = -\frac{\varepsilon_L \bar{\rho} \delta_L^2}{\beta} \nabla \cdot \bar{U}_L \tag{15}$$

where $\bar{\rho} = \frac{\rho_L}{\rho}$ and the operator ∇ and ∇^2 are again designated to have their usual meaning in the changed variables

The scalar point potential functions ϕ and ϕ_L and vector point potential functions $\vec{\psi}$ and $\vec{\psi}_L$ have been defined through the relations given below:

$$\begin{aligned} \vec{U} &= \nabla\phi + \nabla \times \vec{\psi}, \nabla \cdot \vec{\psi} = 0 \\ \vec{U}_L &= \nabla\phi_L + \nabla \times \vec{\psi}_L, \nabla \cdot \vec{\psi}_L = 0 \end{aligned} \tag{16}$$

where $\vec{U} = (U, 0, W)$, $\vec{U}_L = (U_L, 0, W)$

In case $\vec{\psi} = (0, -\psi, 0)$ and $\vec{\psi}_L = (0, -\psi_L, 0)$, the above equations provide us

$$\begin{aligned} U &= \phi_{,x} + \bar{\psi}_{,z}, \quad W = \phi_{,z} - \psi_{,x} \\ U_L &= \phi_{L,x}, \quad W_L = \phi_{L,z} \end{aligned} \tag{17}$$

Upon introducing expressions (17) in equations (9)-(15), and noting that $\psi_L = 0$ for inviscid fluid, one obtains

$$\nabla^2 \psi = \frac{1}{\delta^2} \ddot{\psi} \tag{18}$$

$$\nabla^2 \phi - \Theta - \bar{\beta} \mathcal{G} = \ddot{\phi} \tag{19}$$

$$\nabla^2 \Theta - (\dot{\Theta} + \tau_0 \ddot{\Theta}) - \varepsilon_T \nabla^2 (\dot{\phi} + \tau_0 \ddot{\phi}) - \bar{a} (\dot{\mathcal{G}} + \tau_0 \ddot{\mathcal{G}}) = 0 \tag{20}$$

$$\nabla^2 \mathcal{G} - \tilde{w}_b (\dot{\mathcal{G}} + \tau_1 \ddot{\mathcal{G}}) - \varepsilon_C \nabla^4 \phi - \bar{b} \nabla^2 \Theta = 0 \tag{21}$$

$$\nabla^2 \phi_L - \frac{\ddot{\phi}_L}{\delta_L^2 (1 + \varepsilon_L)} = 0 \tag{22}$$

$$\Theta_L = -\frac{\varepsilon_L \bar{\rho}}{\beta (1 + \varepsilon_L)} \ddot{\phi}_L \tag{23}$$

The equation (18) corresponds to decoupled shear motion which remains independent of temperature and mass concentration changes.

3 BOUNDARY CONDITIONS

The boundary conditions to be satisfied at the solid-liquid interface ($Z = 0$) are given by

$$\sigma_{ZZ} = -p, \quad \sigma_{XZ} = 0, \quad W = W_L \tag{24}$$

$$\Theta_{,z} + h_\Theta (\Theta - \Theta_L) = 0 \tag{25}$$

$$\mathcal{G}_{,z} = 0 \tag{26}$$

where h_Θ is Biot's constant, $h_\Theta \rightarrow 0$ corresponds to the thermally insulated boundary and $h_\Theta \rightarrow \infty$ refers to the isothermal one and the pressure (p) of the liquid is given by $p = -\frac{\rho_L}{\rho\delta^2} \ddot{\phi}_L$

4 SOLUTION OF THE PROBLEM

We assume wave solutions of the form

$$\{\phi, \psi, \Theta, \mathcal{G}, \phi_L\} = \{A, B, C, D, E\} \exp\{ik(X \sin \theta - Z \cos \theta - c\tau)\} \tag{27}$$

where $c' \left(= \frac{c}{c_1} \right)$, $\omega' \left(= \frac{\omega}{\omega^*} \right)$, $k' \left(= \frac{k c_1}{\omega^*} \right)$ are the non-dimensional phase velocity, frequency and wave number of waves respectively. The primes have been suppressed for convenience. Upon using solution (27) in equations (18)-(23), one obtains a system of algebraic equations in unknowns A, B, C, D and E. The condition for the existence of non-trivial solution of this system of equations on simplification, provides us

$$k_j^2 = a_j^2 \omega^2 \quad (j = 1, 2, 3, 4, 5) \tag{28}$$

where

$$\begin{aligned} \sum a_1^2 &= 1 + \tau_1' \tilde{w}_b + \tau_0' [(1 + \bar{a}\bar{b})(1 + \varepsilon_a) + (1 + \bar{\beta}\bar{b})(\varepsilon_T - \varepsilon_a)] / (1 - \varepsilon_C) \\ \sum a_1^2 a_2^2 &= \tau_0' (1 - \bar{a}\bar{b}) + \tau_1' \tilde{w}_b [1 + \tau_0' (1 + \varepsilon_T)] / (1 - \varepsilon_C) \\ \sum a_1^2 a_2^2 a_3^2 &= \tau_0' \tau_1' \tilde{w}_b / (1 - \varepsilon_C) \\ a_4^2 &= \frac{1}{\delta^2}, \quad a_5^2 = \frac{1}{\delta_L^2 (1 + \varepsilon_L)} \\ \tau_0' &= \tau_0 + i\omega^{-1}, \quad \tau_1' = \tau_1 + i\omega^{-1}, \quad \varepsilon_a = \varepsilon_C / \bar{b}\bar{\beta} \end{aligned} \tag{29}$$

In the absence of mass diffusion $a = 0 = \beta_2$, the quantities $a_i^2 (i = 1, 2, 3, 4, 5)$ defined in equation (29) become

$$a_2^2 = \tau_1' \tilde{w}_b, \quad a_1^2 + a_3^2 = 1 + \tau_0' (1 + \varepsilon_T), \quad a_1^2 a_3^2 = \tau_0', \quad a_4^2 = \frac{1}{\delta^2}, \quad a_5^2 = \frac{1}{\delta_L^2 (1 + \varepsilon_L)} \tag{30}$$

In case elastic and thermal fields are uncoupled ($\varepsilon_T = 0 = \varepsilon_L$) to each other, the equation (30) reduces to

$$a_1^2 = 1, a_2^2 = \tau'_1 \tilde{w}_b, a_3^2 = \tau'_0, a_4^2 = \frac{1}{\delta^2}, a_5^2 = \frac{1}{\delta_L^2} \tag{31}$$

The equation (30) and (31) will be used for reductions in the following analysis.

5 REFLECTION AND TRANSMISSION AT SOLID-LIQUID INTERFACE

In this section we shall discuss reflection and transmission of waves at the interface of thermo-elasto-diffusive solid and inviscid fluid for *qP*-wave and *qSV*-wave incidence cases.

5.1. Quasi longitudinal (*qP*)-wave incidence

Suppose that a *qP*-wave is incident at the interface from the solid half-space. Then the total wave fields after reflection and transmission of waves from the interface are given by

$$\phi = \phi_i + \phi_r = \left[\begin{aligned} &A_i \exp\{ik_1(X \sin \theta - Z \cos \theta)\} + \\ &\sum_{j=1}^3 A_{rj} \exp\{ik_j(X \sin \theta_j + Z \cos \theta_j)\} \end{aligned} \right] \exp(-i\omega\tau) \tag{32}$$

$$\psi = \psi_r = [A_r \exp\{ik_4(X \sin \theta_4 + Z \cos \theta_4)\}] \exp(-i\omega\tau) \tag{33}$$

$$\Theta = \Theta_i + \Theta_r = \left[\begin{aligned} &\bar{S}_1 A_i \exp\{ik_1(X \sin \theta - Z \cos \theta)\} \\ &+ \sum_{j=1}^3 \bar{S}_j A_{rj} \exp\{ik_j(X \sin \theta_j + Z \cos \theta_j)\} \end{aligned} \right] \exp(-i\omega\tau) \tag{34}$$

$$\vartheta = \vartheta_i + \vartheta_r = \left[\begin{aligned} &\bar{V}_1 A_i \exp\{ik_1(X \sin \theta - Z \cos \theta)\} + \\ &\sum_{j=1}^3 \bar{V}_j A_{rj} \exp\{ik_j(X \sin \theta_j + Z \cos \theta_j)\} \end{aligned} \right] \exp(-i\omega\tau) \tag{35}$$

$$\phi_L = [A_5 \exp\{ik_5(X \sin \theta_5 - Z \cos \theta_5)\}] \exp(-i\omega\tau) \tag{36}$$

$$\Theta_L = [\bar{S}_L A_5 \exp\{ik_5(X \sin \theta_5 - Z \cos \theta_5)\}] \exp(-i\omega\tau) \tag{37}$$

where $\bar{S}_j = \omega^2 S_j$, $\bar{V}_j = \omega^2 V_j$, $\bar{S}_L = \omega^2 S_L$

$$S_j = \bar{\beta} V_j - (1 - a_j^2),$$

$$S_L = \frac{\varepsilon_L \bar{\rho}}{\beta(1 + \varepsilon_L)}$$

$$V_j = \bar{b} a_j^2 [1 - (1 + \varepsilon_a) a_j^2] / [(1 + \bar{\beta} \bar{b}) a_j^2 - \tau'_1 \bar{w}_b], \quad j = 1, 2, 3 \tag{38}$$

In the absence of mass diffusion ($a = 0 = \beta_2$), we have

$$V_j = \begin{cases} 0, & j = 1, 3 \\ 1, & j = 2 \end{cases},$$

$$S_j = \begin{cases} (a_j^2 - 1), & j = 1, 3 \\ 0, & j = 2 \end{cases} \tag{39}$$

In the absence of mass diffusion and thermal variations ($a = 0 = \beta_2, \varepsilon_T = 0$), we have

$$V_j = \begin{cases} 0, & j = 1, 3 \\ 1, & j = 2 \end{cases},$$

$$S_j = \begin{cases} (\tau'_0 - 1), & j = 3 \\ 0, & j = 1, 2 \end{cases} \tag{40}$$

Upon using equations (32)-(37) and employing the boundary conditions (24)-(26), one obtains a system of five coupled algebraic equations (A.1)-(A.5) given in the Appendix.

Since all the waves, incident, reflected or transmitted must be in phase at the interface $Z = 0$ for all values of X and τ , therefore the equations (A.1)-(A.5), lead to

$$k_1 \sin \theta = k_1 \sin \theta_1 = k_2 \sin \theta_2 = k_3 \sin \theta_3 = k_4 \sin \theta_4 = k_5 \sin \theta_5 \tag{41}$$

The equation (41) with the help of equation (28) implies that

$$a_1 \sin \theta = a_1 \sin \theta_1 = a_2 \sin \theta_2 = a_3 \sin \theta_3 = a_4 \sin \theta_4 = a_5 \sin \theta_5 \tag{42}$$

This is the modified form of the Snell's law, which in the absence of thermal, mass diffusion, viscosity and fluid fields ($\Theta = 0 = \varepsilon, \Theta_L = 0 = \varepsilon_L, a = 0 = \beta_2, \rho_L = 0$), becomes

$$\delta \sin \theta_1 = \sin \theta_4$$

This implies that

$$\frac{\sin \theta_1}{c_1} = \frac{\sin \theta_4}{c_2} \tag{43}$$

which is the Snell's law as stated in Achenbach [33].

The system of equations (A.1)-(A.5) with the help of equation (41) can be expressed as

$$AZ_p = B \tag{44}$$

where A , Z_p and B are defined in the Appendix.

Solving the system of equations (44), the amplitude ratios R_k^{qP} ($k = 1, 2, 3, 4$) and T_1^{qP} are obtained as

$$R_1^{qP} = \frac{\Delta_1}{\Delta}, R_2^{qP} = \frac{\Delta_2}{\Delta}, R_3^{qP} = \frac{\Delta_3}{\Delta}, R_4^{qP} = \frac{\Delta_4}{\Delta}, T_1^{qP} = \frac{\Delta_5}{\Delta} \tag{45}$$

where $\Delta = |A|$ has been defined in equation (A.9) of Appendix and Δ_i ($i = 1, 2, 3, 4, 5$) can be obtained from Δ by replacing first, second, third, fourth and fifth column by $[-a_{11} \ a_{21} \ a_{31} \ S_1 a_{41}^* \ V_1 a_{51}]$, respectively.

For the normal ($\theta = 0^0 = \theta_1 = \theta_5$) and grazing ($\theta = 90^0 = \theta_1$) incidence, the relation (45) reduces to

$$R_1^{qP} = \frac{\Delta_1^*}{\Delta^*}, R_2^{qP} = \frac{\Delta_2^*}{\Delta^*}, R_3^{qP} = \frac{\Delta_3^*}{\Delta^*}, R_4^{qP} = \frac{\Delta_4^*}{\Delta^*}, T_1^{qP} = \frac{\Delta_5^*}{\Delta^*}$$

and

$$R_1^{qP} = -1, R_2^{qP} = 0 = R_3^{qP} = R_4^{qP} = T_1^{qP} \tag{46}$$

respectively. The quantities Δ^* and Δ_i^* ($i = 1, 2, 3, 4, 5$) have been defined in equation (A.9) of Appendix.

Thus for the grazing incidence, the reflected qP wave annihilates the incident qP wave and there is no reflection or transmission of other waves through the interface.

In the absence of mass diffusion ($a = 0 = \beta_2$), the non vanishing amplitude ratios are

$$R_1^{qP} = \frac{\hat{\Delta}_1}{\hat{\Delta}}, R_3^{qP} = \frac{\hat{\Delta}_2}{\hat{\Delta}}, R_4^{qP} = \frac{\hat{\Delta}_3}{\hat{\Delta}}, T_1^{qP} = \frac{\hat{\Delta}_4}{\hat{\Delta}} \tag{47}$$

Here the quantities $\hat{\Delta}, \hat{\Delta}_i$ ($i = 1, 2, 3, 4$) are defined by equation (A.9) in the Appendix.

In the absence of mass diffusion and thermal fields ($a = 0 = \beta_2, \epsilon_T = 0$), the non vanishing amplitude ratios at normal ($\theta = 0^0 = \theta_1$) and grazing ($\theta = 90^0 = \theta_1$) incidence of qP wave, are given by

$$R_1^{qP} = \frac{\rho_L c_L - \rho c_1}{\rho_L c_L + \rho c_1}, R_3^{qP} = 0 = R_4^{qP}, T_1^{qP} = \frac{2\rho c_L}{\rho_L c_L + \rho c_1}$$

and

$$R_1^{qP} = -1, R_3^{qP} = R_4^{qP} = 0 = T_1^{qP} \tag{48}$$

respectively. The relations (48) are in complete agreement with the corresponding equations of Achenbach (1973). Clearly qP wave is reflected as well as transmitted in case of normal incidence, however, for grazing incidence the reflected qP -wave annihilates the incident one.

5.1.1 Quasi longitudinal (qP)-wave incidence at free surface

In case the liquid media is absent ($\rho_L = 0$), the amplitude ratios for stress free, insulated and stress free, isothermal thermoelastic half-space are, respectively, given by

$$\begin{aligned} R_1^{qP} &= 1 - 2 \frac{\bar{S}_3 i \omega a_3 \cos \theta_3 a_{11} a_{24}}{\Delta_L} \\ R_3^{qP} &= -2 \frac{\bar{S}_1 i \omega a_1 \cos \theta_1 a_{11} a_{24}}{\Delta_L} \\ R_4^{qP} &= 2 \frac{a_{11} i \omega \{ \bar{S}_1 a_1 \cos \theta_1 a_{41} a_{23} - \bar{S}_3 a_3 \cos \theta_3 a_{43} a_{21} \}}{\Delta_L} \end{aligned} \tag{49}$$

and

$$\begin{aligned} R_1^{qP} &= 1 - 2 \frac{\bar{S}_1 (a_{13} a_{24} - a_{23} a_{14}) - \bar{S}_3 a_{11} a_{24}}{\Delta_L^*} \\ R_3^{qP} &= -2 \frac{\bar{S}_1 a_{21} a_{14}}{\Delta_L^*} \\ R_4^{qP} &= 2 \frac{\bar{S}_1 a_{21} a_{13} - \bar{S}_3 a_{11} a_{21}}{\Delta_L^*} \end{aligned} \tag{50}$$

where

$$\Delta_L = \bar{S}_1 i \omega a_1 \cos \theta_1 (a_{13} a_{24} - a_{23} a_{14}) - \bar{S}_3 i \omega a_3 \cos \theta_3 (a_{11} a_{24} - a_{21} a_{14}) \tag{51}$$

$$\Delta_L^* = \bar{S}_1 (a_{13} a_{24} - a_{23} a_{14}) - \bar{S}_3 (a_{11} a_{24} - a_{21} a_{14}) \tag{52}$$

In the absence of mass diffusion, fluid and thermal fields ($a = 0 = \beta_2, \epsilon_T = 0 = \rho_L$), the non-vanishing amplitude ratios are

$$R_1^{qP} = \frac{\delta^2 \sin 2\theta_1 \sin 2\theta_4 - \cos^2 2\theta_4}{\delta^2 \sin 2\theta_1 \sin 2\theta_4 + \cos^2 2\theta_4}$$

$$R_4^{qP} = -\frac{2\delta^2 \sin 2\theta_1 \cos 2\theta_4}{\delta^2 \sin 2\theta_1 \sin 2\theta_4 + \cos^2 2\theta_4} \tag{53}$$

Relations (53) are in complete agreement with the corresponding equations as in Achenbach (1973). In case of both normal ($\theta = 0^0 = \theta_1$) and grazing ($\theta = 90^0 = \theta_1$) incidence, the relations (53) provide us

$$R_1^{qP} = -1, R_4^{qP} = 0 \tag{54}$$

Thus, the incident qP -wave is reflected as qP -wave without change in phase in case of normal incidence and the reflected qP -wave annihilates the incident qP -wave for grazing incidence one. It may be noted from the above analytical expressions for the reflection/transmission coefficients that the characteristics of reflected and transmitted waves depends on material parameters and incidence angle in addition to thermal variation and fluid loading effects.

5.2 Quasi transverse (qSV)-wave incidence

Now consider the reflection and transmission of a plane qSV -wave for similar conditions on the boundary as in Section 5.1 above. The total displacement field in this case is given by

$$\psi = \psi_i + \psi_r = \left[\begin{array}{l} A_{i_4} \exp\{ik_4(X \sin \theta - Z \cos \theta)\} + \\ A_4 \exp\{ik_4(X \sin \theta_4 + Z \cos \theta_4)\} \end{array} \right] \exp(-i\omega\tau)$$

$$\phi = \phi_r, \Theta = \Theta_r, \mathcal{G} = \mathcal{G}_r, \phi_L = \phi_{Lr}, \Theta_L = \Theta_{Lr} \tag{55}$$

where $\phi_r, \Theta_r, \mathcal{G}_r, \phi_{Lr}, \Theta_{Lr}$ are defined in equations (32)-(37).

Upon using expressions (55) in the boundary conditions (24)-(26), at the surface $Z = 0$ and assuming that all the incident, reflected or transmitted waves are in phase at this surface for all values of X and τ , so that

$$k_4 \sin \theta = k_1 \sin \theta_1 = k_2 \sin \theta_2 = k_3 \sin \theta_3 = k_4 \sin \theta_4 = k_5 \sin \theta_5 \tag{56}$$

we obtain a system of five coupled algebraic equations given as

$$AZ_s = B_1 \tag{57}$$

Where

$$B_1 = [a_{14} - a_{24} - a_{34} S_1 a_{41}^* V_1 a_{51}]'$$

$$Z_s = [R_1^{qSV}, R_2^{qSV}, R_3^{qSV}, R_4^{qSV}, T_1^{qSV}]'$$

Upon solving system of equations (57), the amplitude ratios can be obtained as

$$R_1^{qSV} = \frac{\tilde{\Delta}_1}{\Delta}, R_2^{qSV} = \frac{\tilde{\Delta}_2}{\Delta}, R_3^{qSV} = \frac{\tilde{\Delta}_3}{\Delta}, R_4^{qSV} = \frac{\tilde{\Delta}_4}{\Delta}, T_1^{qSV} = \frac{\tilde{\Delta}_5}{\Delta} \tag{58}$$

where $R_k^{qSV} = \frac{A_{i_k}}{A_{i_1}}$ ($k=1,2,3,4$) and $T_1^{qSV} = \frac{A_5}{A_{i_1}}$ are amplitude ratios of the reflected and transmitted waves. Here, the quantities $\tilde{\Delta}_i$ ($i=1,2,3,4,5$) used in equation (58) can be obtained from Δ by replacing first, second, third, fourth and fifth column by $[a_{14} - a_{24} - a_{34} \ S_1 a_{41}^* \ V_1 a_{51}]'$ respectively.

In case of both normal ($\theta = 0^0 = \theta_4 = \theta_5$) and grazing ($\theta = 90^0 = \theta_4$) incidence, the relation (58) reduces to

$$R_4^{qSV} = -1, R_1^{qSV} = R_2^{qSV} = R_3^{qSV} = 0 = T_1^{qSV} \tag{59}$$

Thus the shear (qSV) wave is reflected as qSV -wave in case of normal incidence and the reflected (qSV) wave annihilates the incident wave for grazing incidence.

In the absence of mass diffusion ($a = 0 = \beta_2$), the non vanishing amplitude ratios are

$$R_1^{qSV} = \frac{\hat{\Delta}'_1}{\hat{\Delta}}, R_3^{qSV} = \frac{\hat{\Delta}'_2}{\hat{\Delta}}, R_4^{qSV} = \frac{\hat{\Delta}'_3}{\hat{\Delta}}, T_1^{qSV} = \frac{\hat{\Delta}'_4}{\hat{\Delta}} \tag{60}$$

Here, the quantities $\hat{\Delta}'_i$ ($i=1,2,3,4$) used in equation (60) can be obtained from $\hat{\Delta}$ by replacing first, second, third and fourth column by $[a_{14} - a_{24} - a_{34} \ \bar{S}_1 a_{41}^*]'$ respectively.

In the absence of mass diffusion and thermal fields ($a = 0 = \beta_2, \epsilon_T = 0$), the amplitude ratios at normal ($\theta = 0^0 = \theta_1$) and grazing ($\theta = 90^0 = \theta_1$) incidence of qSV wave, are given by

$$R_1^{qSV} = R_3^{qSV} = 0 = T_1^{qSV}, R_4^{qSV} = -1 \tag{61}$$

Thus only shear (qSV) wave is reflected as qSV -wave in case of normal incidence and the reflected (qSV) wave annihilates the incident wave for grazing incidence case. The other waves do not reflect or transmit in either case.

5.2.1 Quasi transverse (qSV)-wave incidence at the free surface

In case ($\rho_L = 0$), the amplitude ratios for stress free, insulated and stress free, isothermal thermoelastic half-space are, respectively, given by

$$R_1^{qSV} = \frac{i\omega(\bar{S}_1 a_1 \cos \theta_1 (a_{13} a_{24} - a_{23} a_{14}) - 2\bar{S}_3 a_3 \cos \theta_3 a_{14} a_{24})}{\Delta_L}$$

$$R_3^{qSV} = \frac{i\omega(2\bar{S}_1 a_1 \cos \theta_1 a_{14} a_{24} - \bar{S}_1 a_1 \cos \theta_1 (a_{11} a_{24} - a_{21} a_{14}))}{\Delta_L}$$

$$R_4^{qSV} = 1 - \frac{i\omega(2\bar{S}_1 a_1 \cos \theta_1 a_{13} a_{24} - 2\bar{S}_3 a_3 \cos \theta_3 a_{11} a_{24} - \bar{S}_1 a_1 \cos \theta_1 (a_{11} a_{23} - a_{21} a_{13}))}{\Delta_L} \tag{62}$$

and

$$R_1^{qSV} = -\frac{(\bar{S}_1 (a_{13} a_{24} - a_{23} a_{14}) + 2\bar{S}_3 a_{14} a_{24})}{\Delta_L^*}$$

$$R_3^{qSV} = \frac{(2\bar{S}_1 a_{24} a_{14} + \bar{S}_1 (a_{11} a_{24} - a_{21} a_{14}))}{\Delta_L^*} \tag{63}$$

$$R_4^{qSV} = 1 - \frac{(2\bar{S}_1 a_{24} a_{13} - 2\bar{S}_3 a_{11} a_{24} + \bar{S}_1 (a_{11} a_{23} - a_{21} a_{13}))}{\Delta_L^*}$$

where Δ_L and Δ_L^* are defined in equations (51) and (52) respectively.

In the absence of mass diffusion, fluid and thermal fields ($a = 0 = \beta_2, \varepsilon_T = 0 = \rho_L$), the non vanishing amplitude ratios are

$$R_1^{qSV} = -\frac{\sin 4\theta_3}{\delta^2 \sin 2\theta_1 \sin 2\theta_3 + \cos^2 2\theta_3}$$

$$R_4^{qSV} = \frac{\delta^2 \sin 2\theta_1 \sin 2\theta_3 - \cos^2 2\theta_3}{\delta^2 \sin 2\theta_1 \sin 2\theta_3 + \cos^2 2\theta_3} \tag{64}$$

Equations (64) are in agreement with the corresponding equations as in Achenbach (1973). In case of both normal ($\theta = 0^0 = \theta_4$) and grazing ($\theta = 90^0 = \theta_4$) incidence of qSV wave, the expressions for reflection coefficients in equation (63) provide us

$$R_1^{qSV} = 0, R_4^{qSV} = -1 \tag{65}$$

Thus only shear wave is reflected as qSV wave without any change of phase in case of normal incidence and reflected qSV -wave annihilates the incident qSV wave in case of grazing incidence. It is noticed that the reflection/transmission characteristics of waves depends upon material parameters and incidence angle in this case too.

6 TOTAL REFLECTION

In this section, the case of total reflection beyond critical angle has been discussed. We consider the equation (56) which implies that

$$k_4 \sin \theta = k_i \sin \theta_i \quad (i = 1, 2, 3, 4) \tag{66}$$

Here the quantities $a_i^2 (i = 1, 2, 3, 4)$ are complex and so does at the wave numbers $k_i^2 (i = 1, 2, 3, 4)$ are also complex. Thus the phase velocities $(c_i = (\omega/k_i) i = 1, 2, 3, 4)$ of these waves are complex and the waves becomes attenuated in space. If we take

$$c_j^{-1} = V_j^{-1} + i\omega^{-1}Q_j, j = 1, 2, 3, 4 \tag{67}$$

where $k_j = \kappa_j + iQ_j$, $\kappa_j = \omega/V_j$ and $Q_j (j = 1, 2, 3, 4)$ are real quantities. Then V_j , Q_j respectively represent phase speed and attenuation coefficients of these waves.

Upon using relations (67) in equation (66), we get

$$\begin{aligned} \kappa_4 \sin \theta &= \kappa_1 \sin \theta_1 = \kappa_2 \sin \theta_2 = \kappa_3 \sin \theta_3 = \kappa_4 \sin \theta_4 \\ Q_1 \sin \theta_1 &= Q_2 \sin \theta_2 = Q_3 \sin \theta_3 = 0 \end{aligned} \tag{68}$$

Because $Q_4 = 0$, therefore

$$\kappa_4 = k_4, \theta = \theta_4, V_4 = c_4, V_j^{-1} \sin \theta_j = V_4^{-1} \sin \theta_4$$

Now upon using equations (66)-(68), the potential function ϕ_r given in equation (32) can be rewritten as

$$\phi_r = \sum_{j=1}^3 A_{rj} \exp\{-Q_j Z\} \exp\{i k_4 (X \sin \theta + Z \sqrt{\delta^2 V_j^{-2} - \sin^2 \theta})\} \exp(-i\omega\tau)$$

Now for qP and qSV waves $V_2 < V_1 \Rightarrow \delta^2 V_1^{-2} < \delta^2 V_2^{-2}$ and $\sin \theta$ increases to the value δV_1^{-1} first for $0 \leq \theta \leq \frac{\pi}{2}$. If $\sin \theta = \delta V_1^{-1} = \sin \theta_c$, then $\theta = \theta_c$ is called critical angle. For $\theta > \theta_c$ the factor $\delta^2 V_1^{-2} - \sin^2 \theta$ becomes purely imaginary. In the absence of thermal field the critical angle θ_c for elastic wave is obtained when $V_1 = 1$, so that $\theta_c = \sin^{-1} \delta$. Thus in the presence of thermal field, the value of critical angle increases as $V_1 > 1$ or < 1 . For $\sin \theta > \delta V_1^{-1} > \delta V_2^{-1}$, we have

$$\phi_r = \sum_{j=1}^2 A_{rj} \exp[-\{Q_j + k_4 \sqrt{\sin^2 \theta - \delta^2 V_j^{-2}}\}Z] \exp\{i(k_4 X \sin \theta - \omega\tau)\} \tag{69}$$

Thus the thermal part and elastic part of reflected P-wave propagates horizontally in X -direction and these quantities decay exponentially with depth.

Moreover, we have also considered the relation $\delta a_1 \sin \theta_1 = \sin \theta$, which shows that θ_1 is real only if $\theta < \theta_c$, where $\theta_c = \sin^{-1}(a_1 \delta)$, this equals to $\theta_c = \sin^{-1}(\delta) = 29^\circ$ in the absence of mass diffusion. In the presence of mass diffusion for qP wave, the critical angle is $\theta_c = 29^\circ.96'$ (see

numerical results later on) and beyond this cutoff point maximum incident shear wave power is converted to reflected shear wave.

7 ENERGY EQUATIONS

From the principle of energy, the energy carried to the boundary by the incident wave must be equal to the energy carried away from the boundary by the reflected and transmitted waves.

For the incident qP waves the particle velocities are

$$\bar{U} = \frac{\partial^2 \phi_i}{\partial X \partial \tau} = k_1^2 c \sin \theta A_i \exp\{ik_1(X \sin \theta - Z \cos \theta - c\tau)\}$$

$$\bar{W} = \frac{\partial^2 \phi_i}{\partial Z \partial \tau} = -k_1^2 c \cos \theta A_i \exp\{ik_1(X \sin \theta - Z \cos \theta - c\tau)\}$$

$$\bar{\Theta} = \frac{\partial \Theta_i}{\partial \tau} = -ik_1 c \bar{S}_1 A_i \exp\{ik_1(X \sin \theta - Z \cos \theta - c\tau)\}$$

$$\bar{\mathcal{G}} = \frac{\partial \mathcal{G}_i}{\partial \tau} = -ik_1 c \bar{V}_1 A_i \exp\{ik_1(X \sin \theta - Z \cos \theta - c\tau)\}$$

For the reflected qP waves

$$\bar{U} = \sum_{j=1}^3 k_j^2 c \sin \theta_j A_{r_j} \exp\{ik_j(X \sin \theta_j + Z \cos \theta_j - c\tau)\}$$

$$\bar{W} = \sum_{j=1}^3 k_j^2 c \cos \theta_j A_{r_j} \exp\{ik_j(X \sin \theta_j + Z \cos \theta_j - c\tau)\}$$

$$\bar{\Theta} = \sum_{j=1}^3 -ik_j c \bar{S}_j A_{r_j} \exp\{ik_j(X \sin \theta_j + Z \cos \theta_j - c\tau)\}$$

$$\bar{\mathcal{G}} = \sum_{j=1}^3 -ik_j c \bar{V}_j A_{r_j} \exp\{ik_j(X \sin \theta_j + Z \cos \theta_j - c\tau)\}$$

For the reflected qSV waves

$$\bar{U} = k_4^2 c \sin \theta_4 A_{r_4} \exp\{ik_4(X \sin \theta_4 + Z \cos \theta_4 - c\tau)\}$$

$$\bar{W} = k_4^2 c \cos \theta_4 A_{r_4} \exp\{ik_4(X \sin \theta_4 + Z \cos \theta_4 - c\tau)\}$$

For the transmitted qP waves

$$\bar{U}_L = k_5^2 c \sin \theta_5 A_5 \exp\{ ik_5 (X \sin \theta_5 - Z \cos \theta_5 - c \tau) \}$$

$$\bar{W}_L = k_5^2 c \cos \theta_5 A_5 \exp\{ ik_5 (X \sin \theta_5 - Z \cos \theta_5 - c \tau) \}$$

$$\bar{\Theta}_L = -ik_5 c \bar{S}_L A_5 \exp\{ ik_5 (X \sin \theta_5 - Z \cos \theta_5 - c \tau) \}$$

If we take the kinetic energy per unit volume as $\frac{1}{2} \rho (\bar{U}^2 + \bar{W}^2 + \bar{\Theta}^2 + \bar{\mathcal{G}}^2)$, then the energy flux for the waves mentioned above may be computed by multiplying the total energy per unit volume by the velocity of propagation and the area of the wave front involved. Here the cross-sectional areas of the incident, reflected and transmitted waves are proportional to the cosines of the angles made by the ray directions of the waves with the normal to the interface. Thus, we may write the equality between the incident, reflected and transmitted waves in case of qP waves for the unit area on the interface as

$$1 = R_1^2 + \frac{a_2^2}{a_1^2} \left(\frac{a_2^2 - S_2^2 - V_2^2}{(a_1^2 - S_1^2 - V_1^2)} \right) R_2^2 \frac{\cos \theta_2}{\cos \theta_1} + \frac{a_3^2}{a_1^2} \left(\frac{a_3^2 - S_3^2 - V_3^2}{(a_1^2 - S_1^2 - V_1^2)} \right) R_3^2 \frac{\cos \theta_3}{\cos \theta_1} + \frac{a_4^4}{a_1^2} \left(\frac{1}{(a_1^2 - S_1^2 - V_1^2)} \right) R_4^2 \frac{c_2}{c_1} \frac{\cos \theta_4}{\cos \theta_1} + \bar{\rho} \frac{a_5^2}{a_1^2} \left(\frac{a_5^2 - S_L^2}{(a_1^2 - S_1^2 - V_1^2)} \right) T_1^2 \frac{c_L}{c_1} \frac{\cos \theta_5}{\cos \theta_1} \quad (70)$$

(= f^{TED} , say)

In the absence of mass diffusion ($a = 0 = \beta_2$), the energy equation is given by

$$1 = R_1^2 + \frac{a_3^2}{a_1^2} R_3^2 \frac{\cos \theta_3}{\cos \theta_1} + \frac{1}{\delta^3 a_1^2} R_4^2 \frac{\cos \theta_4}{\cos \theta_1} + \bar{\rho} \frac{a_5^2}{a_1^2} \left(a_5^2 - \frac{\varepsilon_L \bar{\rho}}{\beta(1 + \varepsilon_L)} \right) T_1^2 \frac{c_L}{c_1} \frac{\cos \theta_5}{\cos \theta_1} \quad (71)$$

(= f^{TE} , say)

In the absence of mass diffusion and thermal fields ($a = 0 = \beta_2, \varepsilon_T = 0$), the energy equation is given by

$$1 = R_1^2 + \frac{1}{\delta^3} R_4^2 \frac{\cos \theta_4}{\cos \theta_1} + \bar{\rho} \frac{1}{\delta_L^4} T_1^2 \frac{c_L}{c_1} \frac{\cos \theta_5}{\cos \theta_1} \quad (= f^E, say) \quad (72)$$

For the incident qSV waves the particle velocities are

$$\bar{U} = \frac{\partial^2 \psi_i}{\partial X \partial \tau} = k_4^2 c \sin \theta A_i \exp\{ ik_4 (X \sin \theta - Z \cos \theta - c \tau) \}$$

$$\bar{W} = \frac{\partial^2 \psi_i}{\partial Z \partial \tau} = -k_4^2 c \cos \theta A_i \exp\{ik_3(X \sin \theta - Z \cos \theta - c\tau)\}$$

In this case, the energy equation may be obtained by writing the equality between the incident qSV wave and the sum of the reflected qP wave, reflected qSV wave and transmitted qP wave energies for the unit area on the interface as

$$\begin{aligned} 1 = & \frac{a_1^2}{a_4^4} (a_1^2 - S_1^2 - V_1^2) R_1^2 \frac{c_1 \cos \theta_1}{c_2 \cos \theta_4} + \frac{a_2^2}{a_4^4} (a_2^2 - S_2^2 - V_2^2) R_2^2 \frac{c_1 \cos \theta_2}{c_2 \cos \theta_4} \\ & + \frac{a_3^2}{a_4^4} (a_3^2 - S_3^2 - V_3^2) R_3^2 \frac{c_1 \cos \theta_3}{c_2 \cos \theta_4} + R_4^2 + \bar{\rho} \frac{a_5^2}{a_4^4} (a_5^2 - S_L^2) T_1^2 \frac{c_L \cos \theta_5}{c_2 \cos \theta_4} \end{aligned} \quad (73)$$

(= g^{TED} , say)

In the absence of mass diffusion ($a = 0 = \beta_2$), the energy equation is given by

$$\begin{aligned} 1 = & a_1^2 \delta^3 R_1^2 \frac{\cos \theta_1}{\cos \theta_4} + a_3^2 \delta^3 R_3^2 \frac{\cos \theta_3}{\cos \theta_4} + R_4^2 + \bar{\rho} \frac{\delta^4}{\delta_L^2} \left(a_5^2 - \frac{\varepsilon_L \bar{\rho}}{\beta(1 + \varepsilon_L)} \right) \frac{c_L T_1^2 \cos \theta_5}{c_2 \cos \theta_4} \end{aligned} \quad (74)$$

(= g^{TE} , say)

In the absence of diffusion and thermal fields ($a = 0 = \beta_2, \varepsilon_T = 0$), the energy equation is given

$$\text{by} \quad 1 = \delta^3 R_1^2 \frac{\cos \theta_1}{\cos \theta_4} + R_4^2 + \bar{\rho} \frac{\delta^4}{\delta_L^2} T_1^2 \frac{c_L \cos \theta_5}{c_2 \cos \theta_4} \quad (= g^E, \text{say}) \quad (75)$$

Here TED stands for thermoelastic-diffusion, TE for thermoelasticity and E for elastic one. It is shown with the help of numerical results in the following section that the energy equation is satisfied in each case.

8 NUMERICAL RESULTS AND DISCUSSIONS

In this section the reflection and transmission coefficients for qP and qSV wave incidences at an interface between thermoelastic-diffusive solid and inviscid fluid have been computed numerically. The material chosen for this purpose is Copper, the physical data for which is given as in Sherief et al. (2004)

$$\varepsilon = 0.0168, \lambda = 7.76 \times 10^{10} \text{ Nm}^{-2}, \mu = 3.86 \times 10^{10} \text{ Nm}^{-2}, \rho = 8.954 \times 10^3 \text{ kg m}^{-3},$$

$$K = 386 \text{ Wm}^{-1} \text{ K}^{-1}, \alpha_T = 1.78 \times 10^{-5} \text{ K}^{-1}, \alpha_c = 1.98 \times 10^{-4} \text{ m}^3 \text{ kg}^{-1}, T_0 = 293 \text{ K},$$

$$C_e = 383.1 \text{ J kg}^{-1} \text{ K}^{-1}, D = 0.85 \times 10^{-8} \text{ kg s m}^{-3}, a = 1.2 \times 10^4 \text{ m}^2 \text{ s}^{-2} \text{ K}^{-1},$$

$$b = 0.9 \times 10^6 \text{ m}^5 \text{ kg}^{-1} \text{ s}^{-2}$$

The liquid chosen for the purpose of numerical calculations is water, the velocity of sound in which is given by $c_L = 1.5 \times 10^3 \text{ m/s}$ and density is $\rho_L = 1000 \text{ kg m}^{-3}$. The values of specific heat of water at different temperatures have been given in Table 1 below:

$T_0^* (K)$	273	283	293	303	313	323	333	343	353	363
C_v^* (J / KgK)	1.008	1.0019	0.99948	0.99866	0.99869	0.9919	1.001	1.0013	1.0029	1.005

Table 1: Specific heat of water at different temperatures (Sharma *et al.*, 2008).

The values of the reflection R_k^{qP} , R_k^{qSV} ($k = 1, 2, 3, 4$) and transmission T_1^{qP} , T_1^{qSV} coefficients for incident qP and qSV waves have been computed from equations (45), (47), (49), (50), (58), (60), (62) and (63) for various values of the angle of incidence (θ) lying between $0^0 \leq \theta \leq 90^0$. The numerical computations have been carried out with the help of MATLAB software. The computed results have been presented graphically in Figures 2-11, and the satisfaction of energy equations at different angles of incidence is given in Table 2. Here, TED refers to thermoelastic diffusion case, ED to elastic-diffusive case and TE to thermo-elastic one.

Figures 2-4, show the energy distribution of reflection and transmission coefficients in case of qP wave incidence at the interface, for thermoelastic diffusion, elastic diffusive and thermoelastic solids, respectively. It is noticed that the transmitted longitudinal wave losses energy with increasing angle of incidence. A significant effect of diffusion is noticed on the transmitted longitudinal wave between the range $20^0 \leq \theta \leq 40^0$. The presence of diffusive field significantly affected the reflected longitudinal wave in the range $0^0 \leq \theta \leq 70^0$, after which the behavior of reflected longitudinal wave is almost similar for each case. The effect of thermal and diffusive fields on the reflected thermal wave is noticed in the range $0^0 \leq \theta \leq 90^0$. In the absence of diffusive field only a meager amount of energy is associated with the reflected thermal wave except in the range $0^0 \leq \theta \leq 20^0$. A significant effect of diffusion and thermal fields has been noticed on the reflected shear wave. From figures 2 and 3, it is noticed that the reflected diffusive wave increases to attain its maximum value at $\theta = 30^0$ and decreases for $30^0 \leq \theta \leq 40^0$ meaning that diffusive wave get sufficient amount of energy before it dies out at $\theta = 90^0$. The transmitted wave also gets affected due to thermoelastic diffusion and mass diffusion for $0^0 \leq \theta \leq 90^0$ via-a-vis thermal variations as evident from Figures 2 to 4.

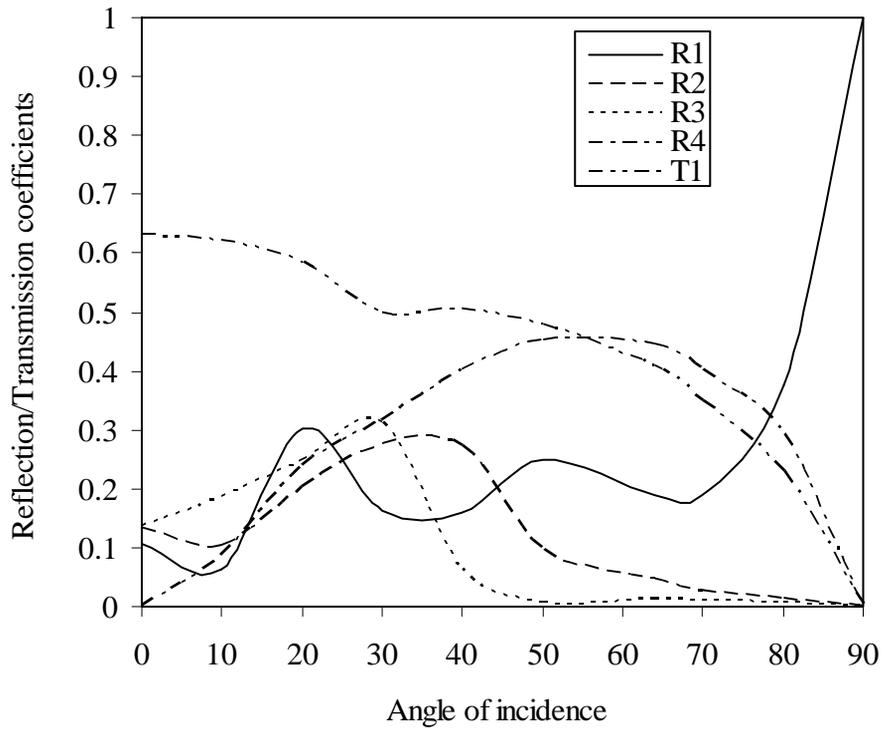


Figure 2: qP -wave incidence at the interface in case of thermoelastic-diffusion (TED).

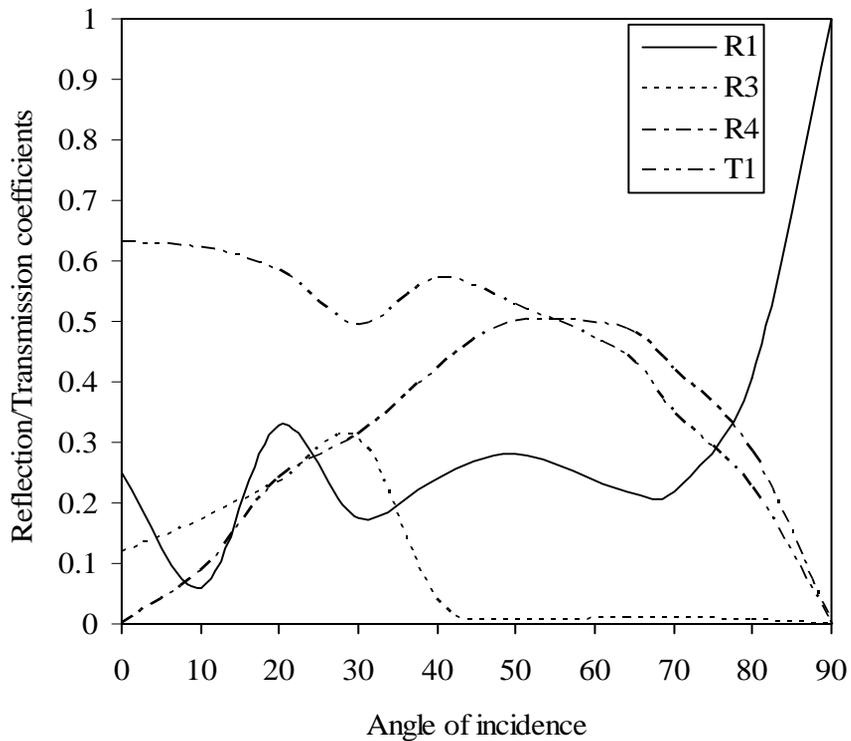


Figure 3: qP -wave incidence at the interface in case of elastic-diffusion (ED).

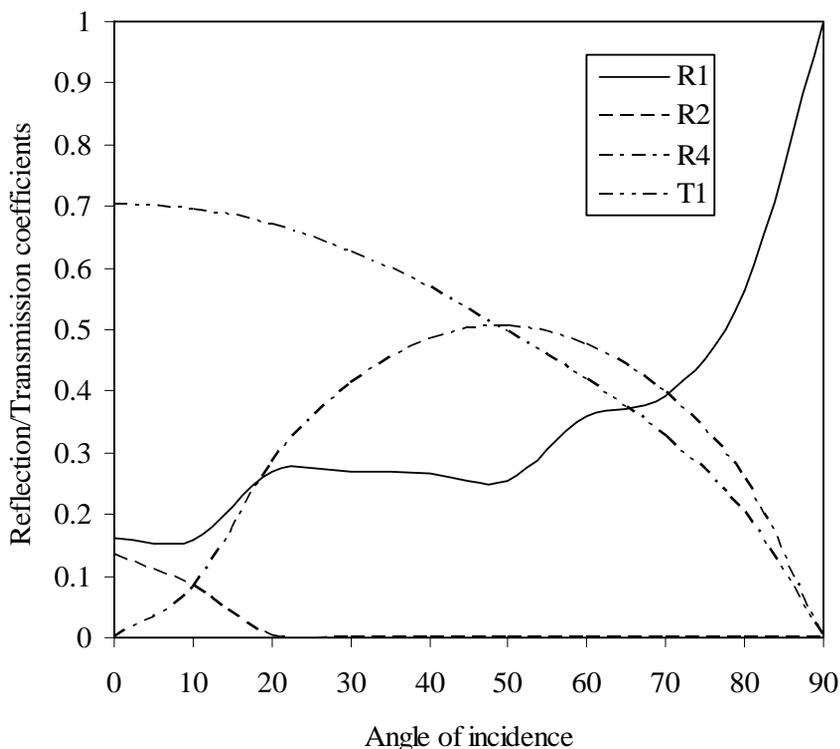


Figure 4: qP -wave incidence at the interface in case of thermoelasticity (TE).

Figures 5 and 6, present the energy distribution of reflection coefficients in case of qP wave incidence at stress free surface for thermoelastic diffusion and thermoelastic solids respectively. The effect of diffusion on reflected longitudinal wave is significantly noticed at the normal incidence $\theta = 0^\circ$. In the presence of mass diffusion and thermal fields, the reflected thermal field decreases with increasing angle of incidence except at $\theta = 50^\circ$, where no reflection of thermal wave is noticed. The reflected diffusive wave decreases with increasing angle of incidence and between $30^\circ \leq \theta \leq 50^\circ$ and it loses energy. In the absence of thermal field only a meager amount of energy is associated with the thermal wave except in the range $0^\circ \leq \theta \leq 20^\circ$. From Figures 2-6, it is revealed that at grazing incidence ($\theta = 90^\circ$), the reflected and transmitted waves of incident qP wave vanishes except reflected longitudinal wave, thereby meaning that reflected longitudinal wave annihilates the incident longitudinal wave. It is noticed that in the absence of mass diffusion and thermal variations, the trend and nature of reflection and transmitted waves almost agrees with those presented in Achenbach (1973) and Kino (1987).

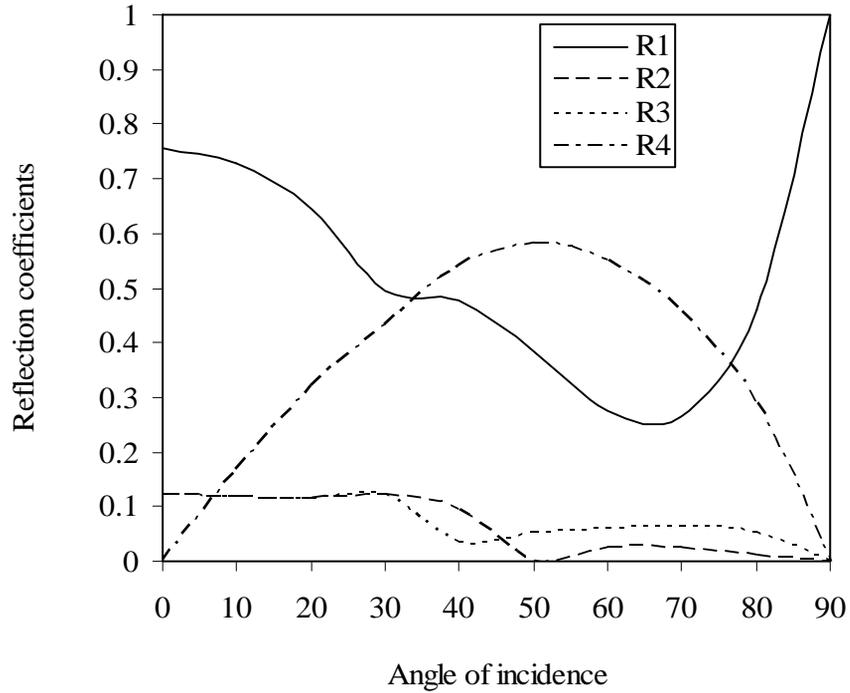


Figure 5: qP -wave incidence at the free surface in case of thermoelastic-diffusion (TED).

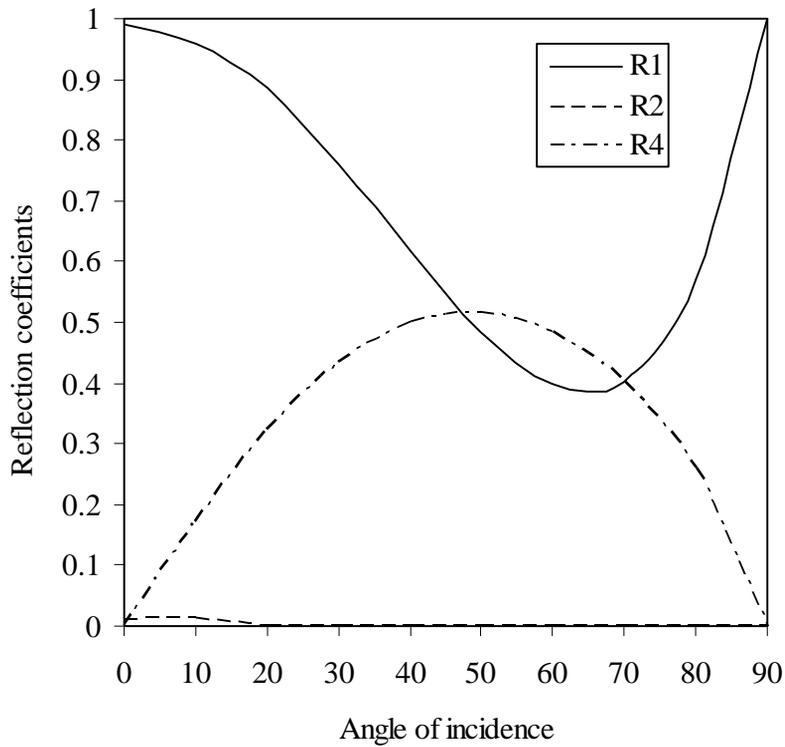


Figure 6: qP -wave incidence at the free surface in case of thermoelasticity (TE).

Figures 7-11, shows the energy distribution of reflection coefficients in case of qSV wave incidence at the interface and stress free surfaces. It is noticed that for shear wave incidence, there exists two critical angles in case of TED and TE: for transmitted longitudinal wave ($\theta = 21^{\circ}.90'$) and for reflected shear wave ($\theta = 29^{\circ}.96'$) beyond which it becomes evanescent in Z -direction and whole of the incident shear wave power is converted to the reflected shear wave. It is also noticed that the reflected longitudinal wave increases to attain its maximum value at $\theta = 30^{\circ}$ due to high stresses generated in the material at this angle of incidence and after that it decreases sharply to become zero at $\theta = 45^{\circ}$. Beyond this longitudinal wave cutoff, only the decaying fields are associated with the longitudinal wave components and it propagates parallel to the surface and a large amount of energy dissipation has been noticed near $\theta = 70^{\circ}$. It is observed that the reflected thermal wave and transmitted longitudinal wave are significantly affected due to the presence of thermal and diffusive fields. From figures 7, 8 and 10, it is noticed that at $\theta = 30^{\circ}$, $|R_3^{qSV}|$ is quite close to zero though not exactly zero, a phenomenon closely analogous to Brewster angle in optics [Kino, (1987)] has been observed. This may be used to convert a shear wave to longitudinal wave.

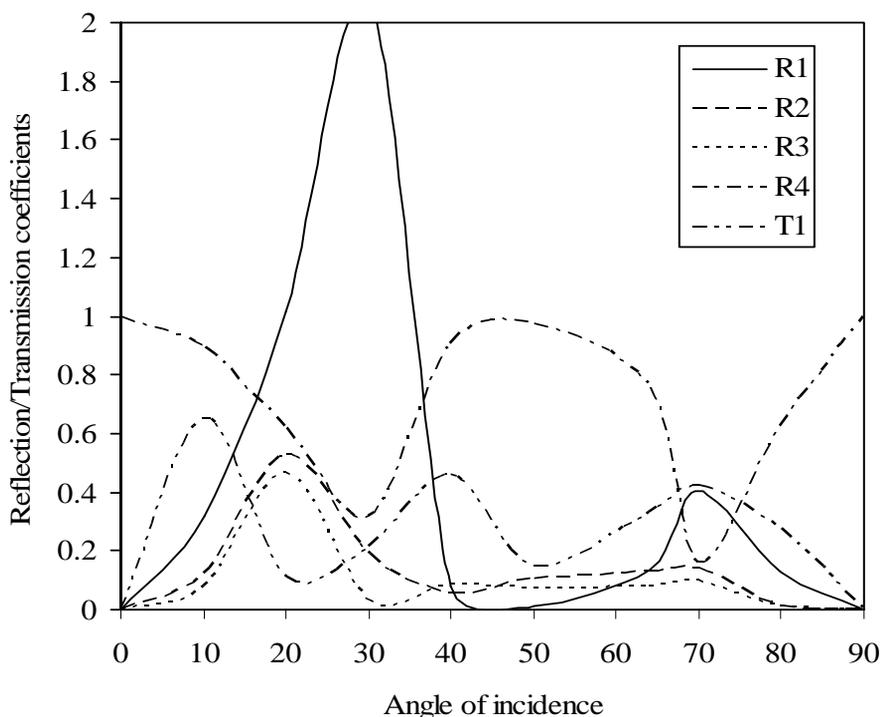


Figure 7: qSV -wave incidence at the interface in case of thermoelastic-diffusion (TED).

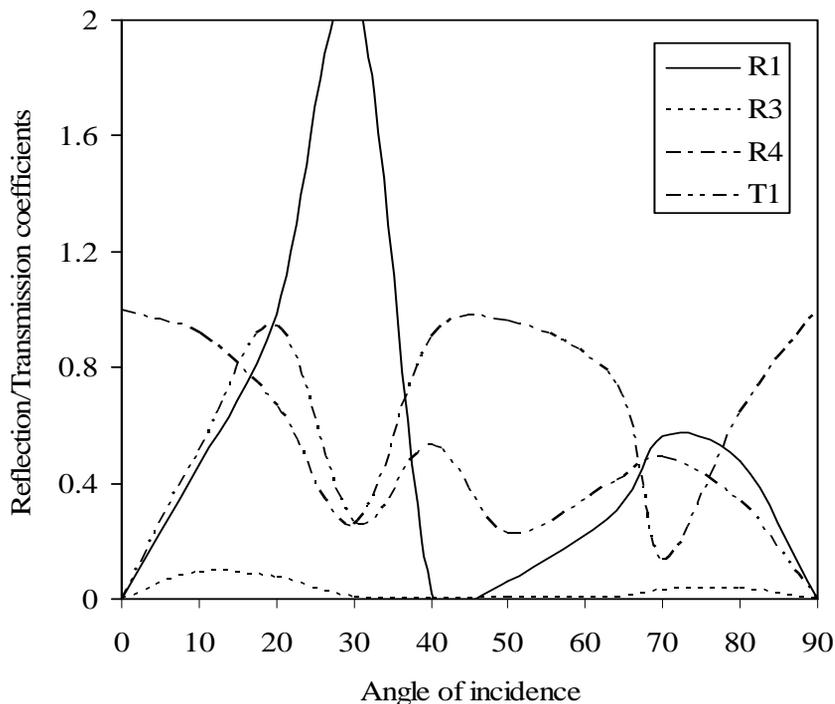


Figure 8: qSV -wave incidence at the interface in case of elastic-diffusion (ED).

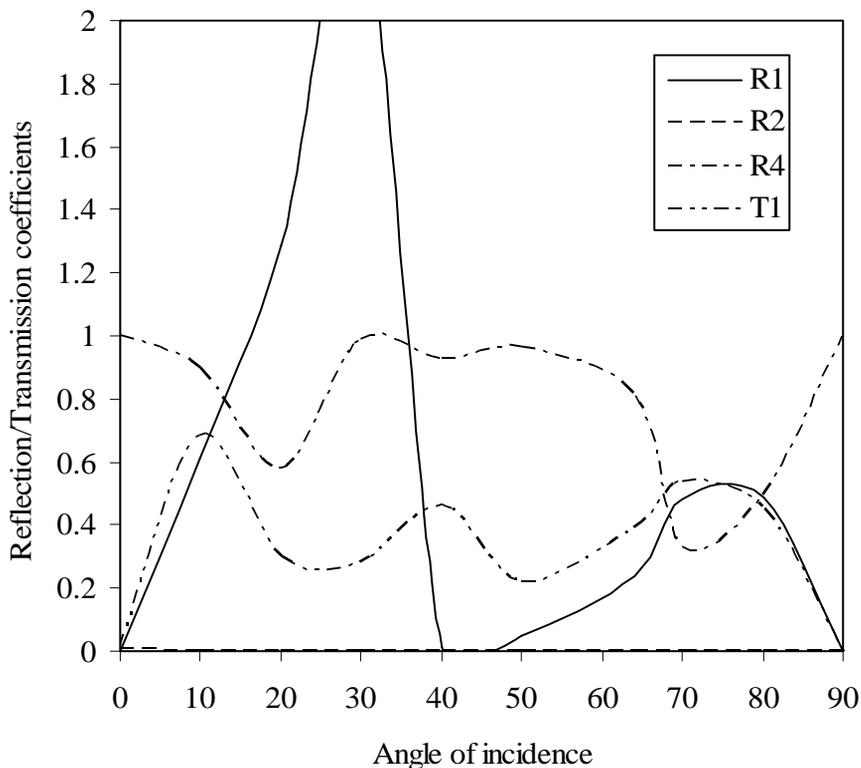


Figure 9: qSV -wave incidence at the interface in case of thermoelasticity (TE).

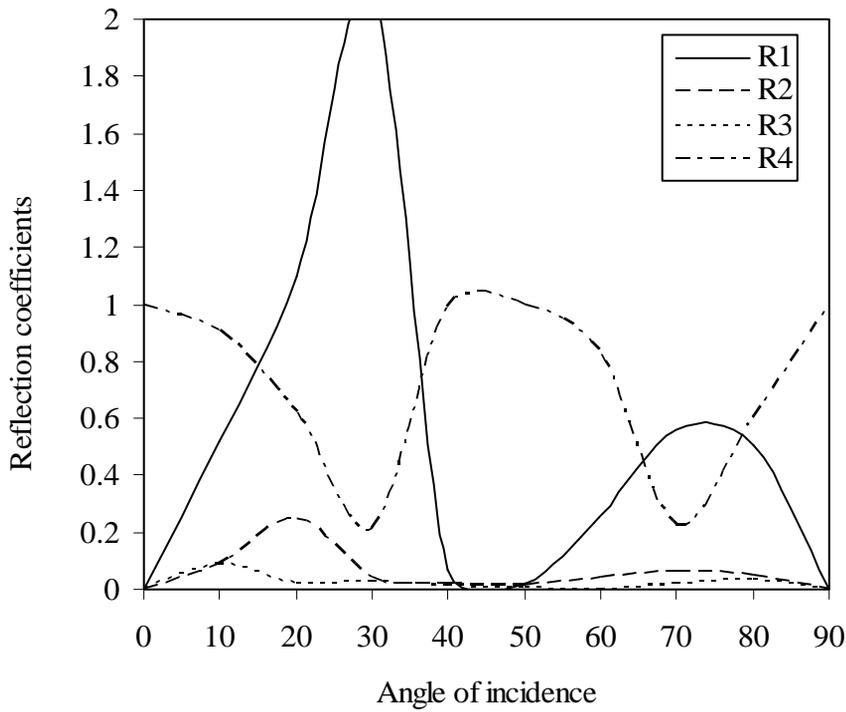


Figure 10: qSV -wave incidence at the free surface in case of thermoelastic-diffusion (TED).

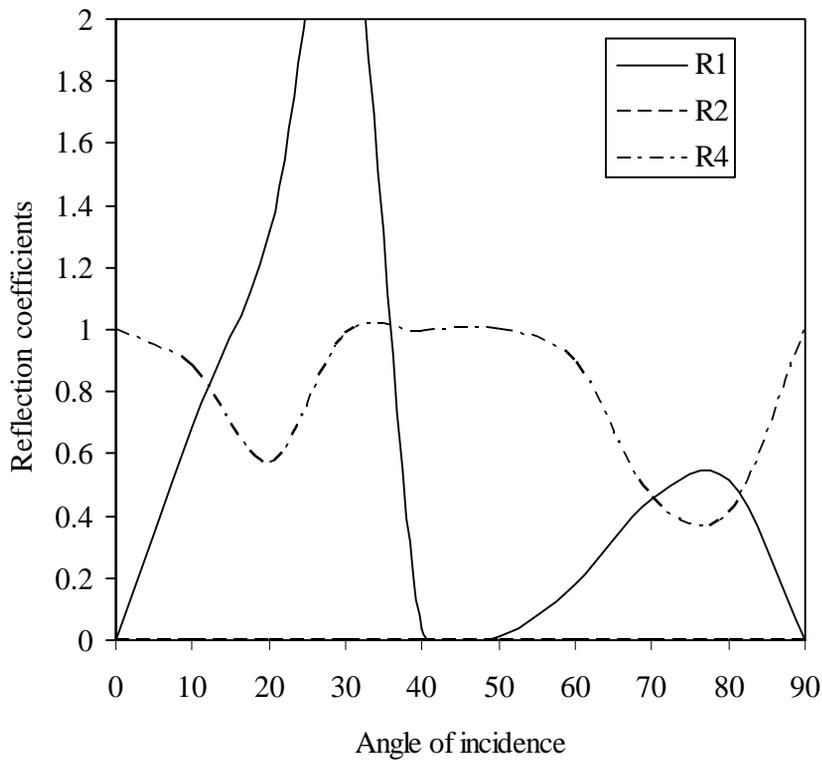


Figure 11: qSV -wave incidence at the free surface in case of thermoelasticity (TE).

θ	0^0	10^0	20^0	30^0	40^0	50^0	60^0	70^0	80^0	90^0
f^{TED}	1	0.9855	0.8233	0.9549	0.9747	0.9508	0.9500	0.9860	0.9867	1
g^{TED}	1	0.9414	0.7190	0.2295	0.8914	0.9663	0.8678	0.1705	0.6103	1
f^{TE}	1	0.9629	0.9189	0.9434	0.9516	0.9194	0.9412	0.9670	0.9893	1
g^{TE}	1	0.9330	0.7224	0.1285	0.8913	0.9713	0.8758	0.1504	0.7619	1
f^E	1	0.9956	0.9366	0.9795	0.9958	0.9940	0.9380	0.9730	0.9915	1
g^E	1	0.9543	0.8191	0.2643	0.8802	0.9486	0.8983	0.2632	0.6802	1

Table 2: The values of energy equations at different angles of incidence.

From Table 2, it is inferred that in case of qP wave incidence energy equation is approximately satisfied at all the incidence angles though it exactly holds near the normal and grazing incident angles. Therefore, there is a slight dissipation of energy at the other angles of incidence. In case of qSV wave incidence, the energy equation holds approximately everywhere except in the neighborhoods of critical angle and $\theta = 80^0$ where large amount of energy dissipation has been noticed. These conclusions are in agreement with Mott (1971).

9 CONCLUDING REMARKS

1. The analytic expressions for reflection and transmission coefficients for qP and qSV wave incident obliquely at the interface between thermoelastic-diffusive solid and inviscid fluid media have been derived.
2. For qP wave incidence at the surface, the significant amount of energy is carried out by transmitted longitudinal wave in the presence of liquid, however the maximum amount of energy is carried out by reflected longitudinal wave in the absence of liquid.
3. For qSV wave incidence at the surface, the maximum amount of energy is carried out by reflected longitudinal wave before the critical angle occurs and there after reflected shear wave becomes prominent.
4. It is observed that the distribution of energy through the reflected and transmitted waves obey energy equations in the respective cases of wave incidence with some exceptions in the neighbourhood of critical angle.
5. The reflection and transmission coefficients have been observed to depend on the material parameters and angle of incidence.
6. Significant effect of mass diffusion and thermal variations has been noticed on the reflection/transmission characteristics of waves.
7. The phenomenon of total reflection reveals that the thermal and elastic parts of reflected qP wave propagate horizontally but decay exponentially with depth.
8. The study may find applications in semiconductor, seismology and signal processing.

References

- Abd-Alla, A.N. and Al-Dawy, Amira A.S., (2000). The reflection phenomena of SV-waves in generalized thermoelastic medium, *International Journal of Mathematics and Mathematical Sciences* 23:529-546.
- Achenbach, J.D., (1973). *Wave propagation in elastic solids*, North Holland, Amsterdam.
- Bijarnia R. and Singh, B., (2012). Propagation of plane waves in an anisotropic generalized thermoelastic solid with diffusion. *Journal of Engineering Physics and Thermophysics*, 85:478-486.
- Das, N.C., Lahiri, A., Sarkar, S. and Basu, S., (2008). Reflection of generalized thermoelastic surface waves from isothermal and insulated boundaries of a half-space *Computers and Mathematics with Applications*, 56:2795-2805.
- Deresiewicz, H., (1960). Effect of boundaries on waves in thermoelastic solids: reflection of plane waves from a plane stress free boundary, *Journal of Mechanics and Physics of Solids*, 8:164-185.
- Green, A.E. and Lindsay, K.A., (1972). Thermoelasticity. *Journal of Elasticity* 2:1-7.
- Gutenberg, B., (1944). Relation of reflected and refracted seismic waves, *Bulletin of Seismological Society of America*, 34:85-102.
- Jeffreys, H., (1930). The thermodynamics of an elastic solids, *Proceeding of the Cambridge Philosophical Society*, 26:101- 106.
- Kino, G.S., (1987). *Acoustic waves: Devices, imaging and analog signal processing*, Prentice Hall, Englewood Cliffs, New Jersey.
- Knott, C.G., (1899). Reflection and refraction of elastic waves with seismological applications, *Philosophical Magazine*, 48:64-97.
- Kumar, R., Ahuja, S. and Garg, S.K., (2014). Rayleigh waves in isotropic microstretch thermoelastic diffusion solid half-space, *Latin American Journal of Solids and Structures*, 11:299-319.
- Kumar, R., Garg, S.K. and Ahuja, S., (2013). Propagation of plane waves at the interface of an elastic solid half-space and a microstretch thermoelastic diffusion solid half-space, *Latin American Journal of Solids and Structures*, 10:1081-1108.
- Kumar R. and Kansal, T., (2012). Reflection and refraction of plane waves at the interface of an elastic solid half-space and a thermoelastic diffusive solid half-space. *Archives of Mechanics*, 64:293-317.
- Lin, C.H., Lee, V.W. and Trifunac, M.D., (2005). The reflection of poroelastic half-space saturated with inviscid fluid, *Soil Dynamics and Earthquake Engineering*, 25:205-223.
- Lord, H.W. and Shulman, Y., (1967). A generalized dynamical theory of thermoelasticity, *Journal of Mechanics and Physics of Solids*, 15: 299-309.
- Mott, G., (1971). Reflection and refraction coefficients at a Fluid-Solid interface, *Journal of Acoustical Society of America*, 50 (3):819-829.
- Nowacki, W. (a), (1974). Dynamical problems of thermo-diffusion in solids-I, *Bulletin of Polish Academy of Sciences Series, Science and Technology*, 22:55-64.
- Nowacki, W. (b), (1974). Dynamic problems of thermo-diffusion in solids-II, *Bulletin of Polish Academy of Sciences Series, Science and Technology*, 22:129-135.
- Nowacki, W. (c), (1974). Dynamic problems of thermo-diffusion in solids-III, *Bulletin of Polish Academy of Sciences Series, Science and Technology*, 22:275-276.
- Nowacki, W., (1976). Dynamic problems of thermo-diffusion in solids, *Engineering Fracture Mechanics*, 8:261-266.
- Sinha, A.N. and Sinha, S.B., (1974) Reflection of thermoelastic waves at a solid half-space with thermal relaxation, *Journal of Physics of the Earth*, 22:237-244.
- Sinha S.B. and Elsibai, K.A., (1996). Reflection of thermoelastic waves at a solid half-space with two thermal relaxation times, *Journal of Thermal Stresses*, 19:763-777.

- Sinha S.B. and Elsibai, K.A., (1997). Reflection and refraction of thermoelastic waves at an interface of two semi infinite media with two thermal relaxation times, *Journal of Thermal Stresses*, 20:129-146.
- Singh, B., (2005). Reflection of P and SV waves from free surface of an elastic solid with generalized thermo-diffusion, *Journal of Earth System Science*, 114:159-168.
- Singh, B., (2006). Reflection of SV waves from the free surface of an elastic solid in generalized thermo-elastic diffusion, *Journal of Sound and Vibration*, 291:764–778.
- Singh, B., (2010). Reflection of plane waves at the free surface of a monoclinic thermoelastic solid half-space, *European Journal of Mechanics A/Solids*, 29:911-916.
- Sherief, H.H., Hamza, F. and Saleh, H., (2004). The theory of generalized thermoelastic diffusion, *International Journal of Engineering Science*, 42:591–608.
- Sharma, A., Sharma, J.N. and Sharma, Y.D., (2012). Modelling Reflection and Transmission of Acoustic Waves at a Semiconductor: Fluid Interface, *Advances in Acoustics and Vibrations*, 2012:1-10.
- Sharma, J.N., (2007). Generalized thermoelastic diffusive waves in heat conducting materials, *Journal of Sound and Vibration*, 301:979-993.
- Sharma, J.N., Kumar, V. and Chand, D., (2003). Reflection of generalized thermoelastic waves from the boundary of a half-space, *Journal of Thermal Stresses*, 26:925-942.
- Sharma, J.N. and Sharma, A., (2010). Reflection of acousto-diffusive waves from the boundary of a semiconductor half-space, *Journal of Applied Physics*, 108:033712-033724.
- Sharma, J.N., Sharma, R. and Sharma, Y.D., (2008). Generalized Rayleigh waves in thermoelastic solids under viscous fluid loading, *International Journal of Applied Mechanics and Engineering*, 13:217-238.
- Sharma, J.N., Walia, V. and Gupta, S.K., (2008). Reflection of piezothermoelastic waves from the charge and stress free boundary of a transversely isotropic half-space, *International Journal of Engineering Science*, 46:131-146.
- Sharma, K. and Bhargava, R.R. (2014). Propagation of thermoelastic plane waves at an imperfect boundary of thermal conducting viscous liquid/generalized thermoelastic solid, *Afrika Matematika*, 25:81-102.
- Wu, K.Y., Xue, Q. and Adler, L., (1990). Reflection and transmission of elastic waves from a fluid-saturated porous solid boundary, *Journal of Acoustical Society of America*, 87:2349–2358.

Appendix

Upon employing the boundary conditions (24)-(26) at the solid-liquid interface, following system of equations is obtained

$$\begin{aligned} \cos 2\theta_4 \exp(\eta_1)R_1^{qP} + \cos 2\theta_4 \exp(\eta_2)R_2^{qP} + \cos 2\theta_4 \exp(\eta_3)R_3^{qP} \\ - \sin 2\theta_4 \exp(\eta_4)R_4^{qP} - \delta^2 \omega_L \exp(\eta_5)T_1^{qP} = -\cos 2\theta \exp(\eta) \end{aligned} \quad (\text{A.1})$$

$$\begin{aligned} \delta^2 a_1^2 \sin 2\theta_1 \exp(\eta_1)R_1^{qP} + \delta^2 a_2^2 \sin 2\theta_2 \exp(\eta_2)R_2^{qP} + \delta^2 a_3^2 \sin 2\theta_3 \exp(\eta_3)R_3^{qP} \\ + \cos 2\theta_4 \exp(\eta_4)R_4^{qP} = \delta^2 a_1^2 \sin 2\theta \exp(\eta) \end{aligned} \quad (\text{A.2})$$

$$\begin{aligned} a_1 \cos \theta_1 \exp(\eta_1)R_1^{qP} + a_2 \cos \theta_2 \exp(\eta_2)R_2^{qP} + a_3 \cos \theta_3 \exp(\eta_3)R_3^{qP} \\ - a_4 \sin \theta_4 \exp(\eta_4)R_4^{qP} + a_5 \cos \theta_5 \exp(\eta_5)T_1^{qP} = a_1 \cos \theta \exp(\eta) \end{aligned} \quad (\text{A.3})$$

$$\bar{S}_1(i\omega a_1 \cos\theta_1 + h_\Theta) \exp(\eta_1)R_1^{qP} + \bar{S}_2(i\omega a_2 \cos\theta_2 + h_\Theta) \exp(\eta_2)R_2^{qP} + \bar{S}_3(i\omega a_3 \cos\theta_3 + h_\Theta) \exp(\eta_3)R_3^{qP} - h_\Theta \bar{S}_L \exp(\eta_5)T_1^{qP} = \bar{S}_1(i\omega a_1 \cos\theta - h_\Theta) \exp(\eta) \tag{A.4}$$

$$\bar{V}_1 i\omega a_1 \cos\theta_1 \exp(\eta_1)R_1^{qP} + \bar{V}_2 i\omega a_2 \cos\theta_2 \exp(\eta_2)R_2^{qP} + \bar{V}_3 i\omega a_3 \cos\theta_3 \exp(\eta_3)R_3^{qP} = \bar{V}_1 i\omega a_1 \cos\theta \exp(\eta) \tag{A.5}$$

where $\eta = ik_1 X \sin\theta$, $\eta_1 = ik_1 X \sin\theta_1$, $\eta_2 = ik_2 X \sin\theta_2$,

$$\eta_3 = ik_3 X \sin\theta_3, \eta_4 = ik_4 X \sin\theta_4, \eta_5 = ik_5 X \sin\theta_5 \tag{A.6}$$

The quantities A , Z_p and B used in equation (44) are given by

$$A = \begin{bmatrix} a_{11} & a_{12} & a_{13} & a_{14} & a_{15} \\ a_{21} & a_{22} & a_{23} & a_{24} & a_{25} \\ a_{31} & a_{32} & a_{33} & a_{34} & a_{35} \\ \bar{S}_1 a_{41} & \bar{S}_2 a_{42} & \bar{S}_3 a_{43} & a_{44} & a_{45} \\ \bar{V}_1 a_{51} & \bar{V}_2 a_{52} & \bar{V}_3 a_{53} & a_{54} & a_{55} \end{bmatrix}, B = \begin{bmatrix} -a_{11} \\ a_{21} \\ a_{31} \\ \bar{S}_1 a_{41}^* \\ \bar{V}_1 a_{51} \end{bmatrix},$$

$$Z_p = [R_1^{qP}, R_2^{qP}, R_3^{qP}, R_4^{qP}, T_1^{qP}]' \tag{A.7}$$

Here $R_k^{qP} = \frac{A_{r_k}}{A_{i_k}}$ ($k = 1, 2, 3, 4$) and $T_1^{qP} = \frac{A_5}{A_{i_1}}$ are amplitude ratios of the reflected and transmitted wave. The quantities a_{ij} ($i, j = 1, 2, 3, 4, 5$) are given by

$$a_{11} = \cos 2\theta_4, a_{12} = \cos 2\theta_4, a_{13} = \cos 2\theta_4, a_{14} = -\sin 2\theta_4, a_{15} = -\delta^2 \omega_L,$$

$$a_{21} = \delta^2 a_1^2 \sin 2\theta_1, a_{22} = \delta^2 a_2^2 \sin 2\theta_2, a_{23} = \delta^2 a_3^2 \sin 2\theta_3, a_{24} = \cos 2\theta_4,$$

$$a_{25} = 0, a_{31} = a_1 \cos\theta_1, a_{32} = a_2 \cos\theta_2, a_{33} = a_3 \cos\theta_3,$$

$$a_{34} = -a_4 \sin\theta_4, a_{35} = a_5 \cos\theta_5, a_{41} = i\omega a_1 \cos\theta_1 + h_\Theta,$$

$$a_{42} = i\omega a_2 \cos\theta_2 + h_\Theta, a_{43} = i\omega a_3 \cos\theta_3 + h_\Theta, a_{44} = 0,$$

$$a_{45} = -h_\Theta S_L, a_{41}^* = a_{41} - 2h_\Theta, a_{51} = i\omega a_1 \cos\theta_1,$$

$$a_{52} = i\omega a_2 \cos\theta_2, a_{53} = i\omega a_3 \cos\theta_3, a_{54} = 0,$$

$$a_{55} = 0, \omega_L = \frac{\rho_L}{\rho \delta^2} \tag{A.8}$$

Also the quantities Δ , Δ^* and $\hat{\Delta}$ used in equations (45), (46) and (47) are given by

$$\Delta = \begin{vmatrix} a_{11} & a_{12} & a_{13} & a_{14} & a_{15} \\ a_{21} & a_{22} & a_{23} & a_{24} & a_{25} \\ a_{31} & a_{32} & a_{33} & a_{34} & a_{35} \\ \bar{S}_1 a_{41} & \bar{S}_2 a_{42} & \bar{S}_3 a_{43} & a_{44} & a_{45} \\ \bar{V}_1 a_{51} & \bar{V}_2 a_{52} & \bar{V}_3 a_{53} & a_{54} & a_{55} \end{vmatrix}$$

$$\Delta^* = \begin{vmatrix} 1 & 1 & 1 & 0 & -\delta^2 \omega_L \\ 0 & 0 & 0 & 1 & 0 \\ a_1 & a_2 & a_3 & 0 & a_5 \\ \bar{S}_1(i\omega a_1 + h_\theta) & \bar{S}_2(i\omega a_2 + h_\theta) & \bar{S}_3(i\omega a_3 + h_\theta) & 0 & -h_\theta \bar{S}_L \\ \bar{V}_1 i\omega a_1 & \bar{V}_2 i\omega a_2 & \bar{V}_3 i\omega a_3 & 0 & 0 \end{vmatrix}, \tag{A.9}$$

$$\hat{\Delta} = \begin{vmatrix} a_{11} & a_{13} & a_{14} & a_{15} \\ a_{21} & a_{23} & a_{24} & a_{25} \\ a_{31} & a_{33} & a_{34} & a_{35} \\ \bar{S}_1 a_{41} & \bar{S}_3 a_{43} & a_{44} & a_{45} \end{vmatrix}$$

Δ_i^* ($i = 1, 2, 3, 4, 5$) can be written from Δ^* by replacing first, second, third, fourth and fifth column by $[-1 \ 0 \ a_i \ \bar{S}_i(i\omega a_i - h_\theta) \ \bar{V}_i i\omega a_i]'$ and also $\hat{\Delta}_i$ ($i = 1, 2, 3, 4$) can be obtained from $\hat{\Delta}$ by replacing first, second, third and fourth column by $[-a_{11} \ a_{21} \ a_{31} \ \bar{S}_1 a_{41}^*]'$ respectively.